


FLANGE REPLACEABLE TYPE ZF-01

TECHNICAL DATA

Size Range	NPS 2" to 45" DN 50 to DN 1200
Seat Style	Soft Replaceable
Pressure Rating	PN6 PN10 PN16 PN25 CL150 JIS 10K
Flange Drilling	PN6 PN10 PN16 ASME B16.5 CL150 JIS 10K
Face to Face	EN558-13 ISO 5752-13 API 609 DIN 3203
Top Flange	ISO 5211
Tightness Test	ISO 5208 API 598 EN 12266-1



DRAWING

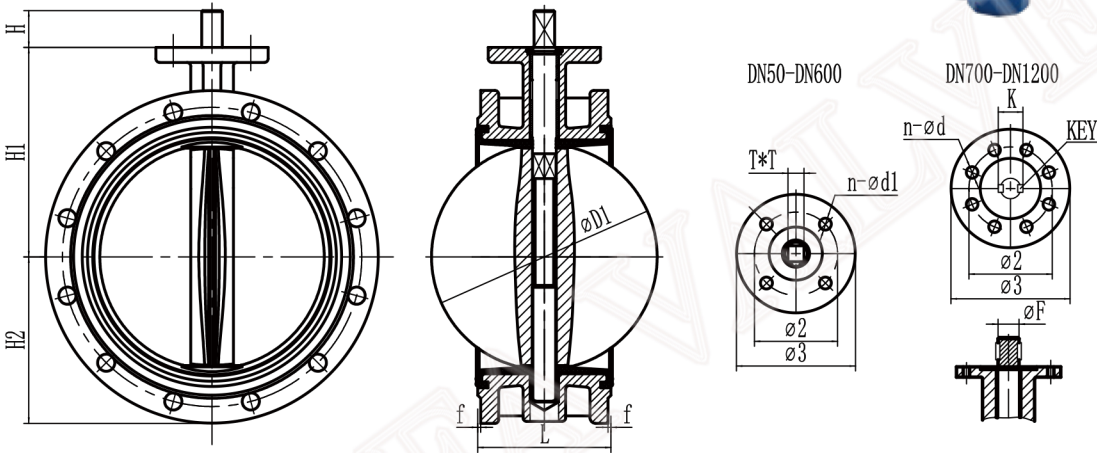

DIMENSIONS

SIZE	L	øD1	f	H1	H2	ø2	ø3	n-ød1	T*T	H	øF	K	KEY
DN50	108	52.6	3	139	80	70	90	4-10	11	30	—	—	—
DN65	112	64.3	3	146	89	70	90	4-10	11	30	—	—	—
DN80	114	78.8	3	150	95	70	90	4-10	11	30	—	—	—
DN100	127	104.0	3	177	114	70	90	4-10	11	30	—	—	—
DN125	140	123.3	3	179	125	70	90	4-10	14	30	—	—	—
DN150	140	155.7	3	201	139	70	90	4-10	14	30	—	—	—
DN200	152	202.4	3	230	170	102	125	4-12	17	40	—	—	—
DN250	165	250.4	3	267	198	102	125	4-12	22	40	—	—	—
DN300	178	301.5	4	298	223	102	125	4-12	22	45	—	—	—
DN350	190	333.3	4	310	254	125	150	4-14	22	45	—	—	—
DN400	216	389.6	4	340	278	140	175	4-18	27	50	—	—	—
DN450	222	440.5	4	375	315	140	175	4-18	27	50	—	—	—
DN500	229	491.6	4	430	348	140	175	4-18	36	50	—	—	—
DN600	267	592.5	5	500	410	165	210	4-22	36	60	—	—	—
DN700	292	695.0	5	560	480	254	300	8-18	—	80	63.35	72.15	18*70
DN800	318	794.7	5	620	530	254	300	8-18	—	80	63.35	72.15	18*70
DN900	330	864.7	5	685	605	254	300	8-18	—	100	75	84.80	20*90
DN1000	410	965.0	5	735	670	254	300	8-18	—	100	85	95.80	22*90
DN1200	470	1160.6	5	917	780	298	350	8-22	—	100	105	117.80	28*90

* Please consult our sales staff to obtain detailed dimensions for other specifications.